



20,000 BTUH

Indoor/Outdoor, NEMA Types 12, 4 & 4X Available

Engineered & manufactured to endure the most difficult of environments and applications. Thermal Edge air conditioners will exceed environmental requirements in applications like *Steel, Food Processing, Petro-Chemical, Cement, Paper & Pulp and Plastics.*

**Options:**

- External Alarm Capabilities
- Corrosive Environment Package
- Low Ambient Packages
- Dry Contact Remote Monitoring Options
- Integrated Enclosure Heat System
- Cooling Capacities of 1000 to 20,000 BTUH
- Hazardous Location Package

Digital Temperature Controller

- Programmable set point and temperature operating controls
- Visible Error and/or alarm messaging
- System status indication
- Password protection

Active Condensate Management System

- Complete elimination of condensate
- Eradicates condensate without corrosive contact with coils

Unit Efficiency

- Pressure operated blower control reduces power inrush and saves energy
- Highly efficient rotary compressor
- Fully insulated & sealed cabinet
- Temperature Control Valve to provide a broad temperature range while maintaining cooling capacity.

Industrial Construction

- Free standing rigid chassis eases installation and maintenance

Compressor Protection System

- High & Low refrigerant cutouts with fault indication
- Compressor anti short cycle protection
- Compressor run capacitors reduce power inrush, save energy and increase compressor life





UL File # SA32252



Model	BTU/Hour	Voltage/Hz.	Running Amps	Max. Ambient Temperature	H x W x D	Weight (lbs.) Unit / Ship
HC200236	20,000	230/1/60	11.75	125°F	56.09" x 23" x 15.03"	205 / 226
HC200486	20,000	480/1/60	6.2	125°F	65.7" x 23" x 15.03"	320 / 342

All information subject to change without notice

Get the Edge...Get Thermal Edge

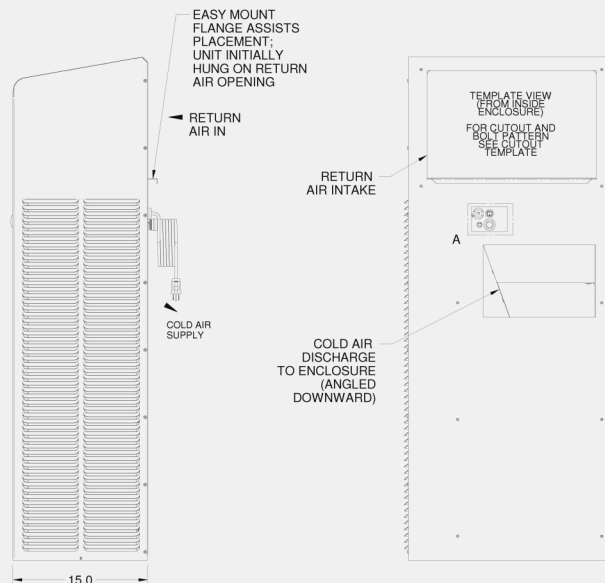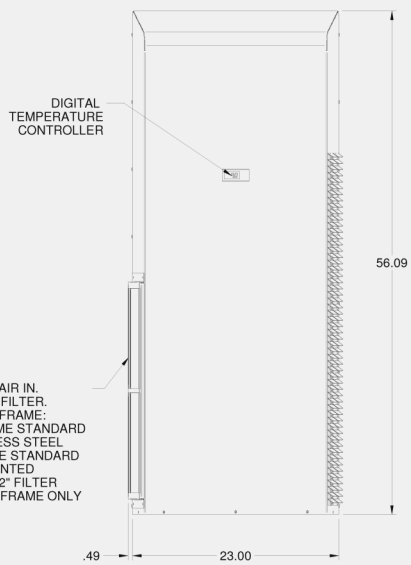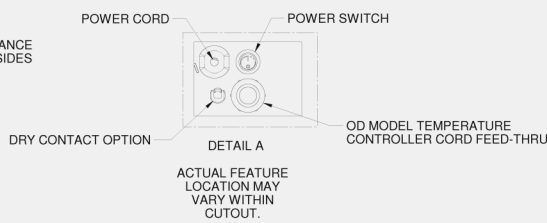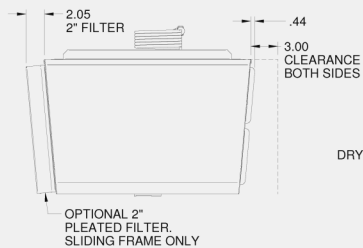

TITLE		HIGH CAPACITY	
DRAWING NO.		HC200	
SCALE		SHEET 1 OF 1	