



Thermal Edge Inc.

PACKAGED SYSTEMS


ELECTRICAL ENCLOSURES WITH UL LISTED AIR CONDITIONERS

UL LISTED NEMA TYPE 12, 4 OR 4X ELECTRICAL ENCLOSURE

PRE CUT AND FINISHED EDGES TO ACCOMMODATE THE AIR CONDITIONER

APPROPRIATELY SIZED UL LISTED AIR CONDITIONER

ALL MOUNTING HARDWARE AND GASKETING

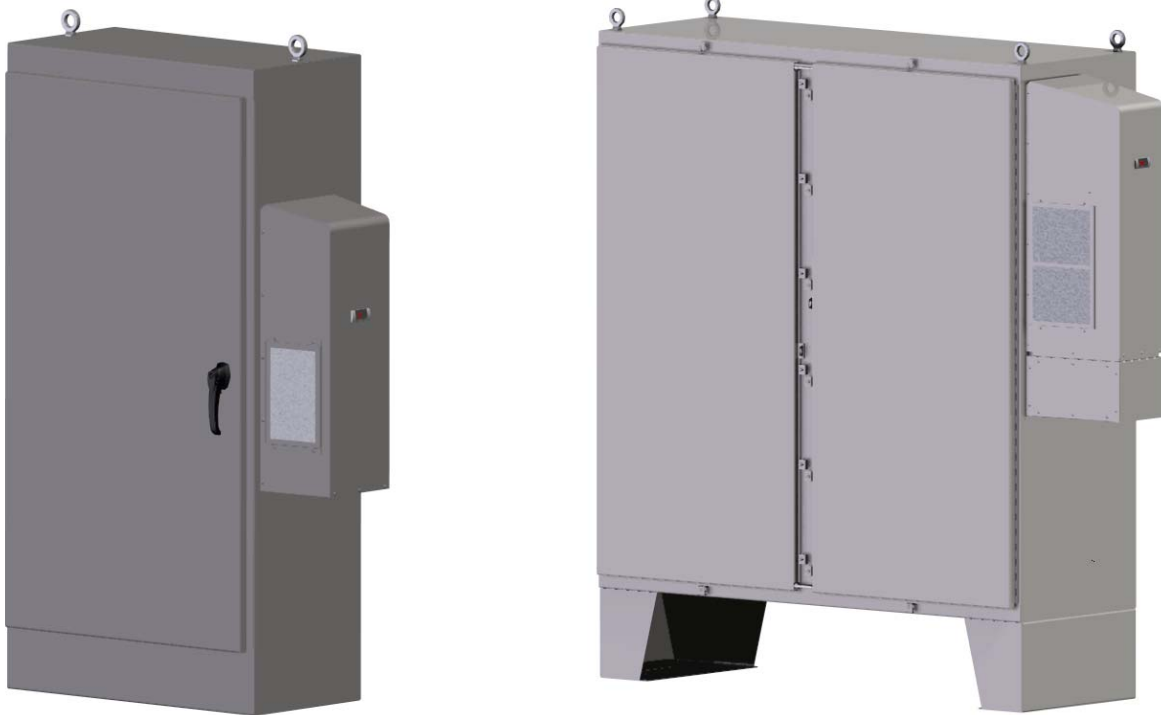


Get the Edge...Get Thermal Edge

UL Type 12 Floor Standing Enclosure, w/interior panel. 10 gauge carbon steel, Key-locking, pad-lockable handle, interior white & exterior ANSI 61 gray, continuous hinge doors. Includes 10 gauge. sub panel painted white



Part Number	x = A/C chassis style	Dimensions H x W x D
606012-12FDTEEx	A, B, C, D, E, F, G, H, J, K	60 x 60 x 12
606016-12FDTEEx	A, B, C, D, E, F, G, H, J, K, L, M, N, P	60 x 60 x 16
726012-12FDTEEx	A, B, C, D, E, F, G, H, J, K	72 x 60 x 12
726016-12FDTEEx	A, B, C, D,, E, F, G, H, J, K, L, M, N, P	72 x 60 x 16
727212-12FDTEEx	A, B, C, D, E, F, G, H, J, K	72 x 72 x 12
727216-12FDTEEx	A, B, C, D, E, F, G, H, J, K, L, M, N, P	72 x 72 x 16
727224-12FDTEEx	A, B, C, D, E, F, G, H, J, K, L, M, N, P, Q, R, S, T	72 x 72 x 24

UL Type 12 Free Standing Enclosure, w/interior panel. 12 gauge carbon steel, key-locking, pad-lockable handle, interior white & exterior ANSI 61 gray, continuous hinge doors. Includes 12 gauge sub panel for single door and 10 gauge sub panel for double door. All panels are painted white

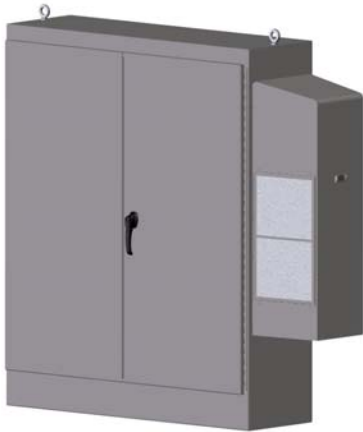

Part number	Doors	x = A/C chassis style	Dimensions H x W x D
723618-12FSSTEx	Single	A, B, C, D, E, F, G, H, J, L, M, N, P	72 x 36 x 18
723624-12FSSTEx	Single	A, B, C, D, E, F, G, H, J, L, M, N, P	72 x 36 x 24
724818-12FSDTEEx	Double	A, B, C, D, E, F, G, H, J, L, M, N, P	72 x 48 x 18
724824-12FSDTEEx	Double	A, B, C, D, E, F, G, H, J, L, M, N, P	72 x 48 x 24
726018-12FSDTEEx	Double	A, B, C, D, E, F, G, H, J, L, M, N, P	72 x 60 x 18
726024-12FSDTEEx	Double	A, B, C, D, E, F, G, H, J, L, M, N, P	72 x 60 x 24
727218-12FSDTEEx	Double	A, B, C, D, E, F, G, H, J, L, M, N, P	72 x 72 x 18
727224-12FSDTEEx	Double	A, B, C, D, E, F, G, H, J, L, M, N, P	72 x 72 x 24

UL Type 4 Floor Standing Enclosure, w/interior panel. 10 gauge carbon steel, pad-lockable, easy release door clamps, interior white & exterior ANSI 61 gray, 12" legs welded, continuous hinge doors. Includes 10 gauge sub panel painted white



Part number	X = A/C chassis style	Dimensions H x W x D
626012-4FDTEEx	A, B, C, D, E, F, G, H, J, K	60 x 60 x 12
746012-4FDTEEx	A, B, C, D, E, F, G, H, J, K	60 x 60 x 12
747224-4FDTEEx	A, B, C, D, E, F, G, H, J, K, L, M, N, P, Q, R, S, T	72 x 60 x 24

UL Type 4 Free Standing Enclosure, w/interior panel. 12 gauge carbon steel, pad-lockable, easy release door clamps, interior white & exterior ANSI 61 gray, continuous hinge doors. Includes 10 gauge Sub panel painted white.



Part number	X = A/C chassis style	Dimensions H x W x D
723118-4FSTEx	A, B, C, D, E, F, G, H, J, K, L, M, N, P	72 x 31 x 18
723718-4FSTEx	A, B, C, D, E, F, G, H, J, K, L, M, N, P	72 x 37 x 18
723724-4FTSTEx	A, B, C, D, E, F, G, H, J, K, L, M, N, P	72 x 37 x 24

UL Type 4X Floor Standing Enclosure, w/interior panel. 12 gauge 304 stainless steel, pad-lockable, easy release door clamps, interior white & exterior ANSI 61 gray, 12" legs welded, continuous hinge doors. Includes 10 gauge sub panel painted white



Part number	X = A/C chassis style	Dimensions H X W x D
626012-4XSFDTEx	A, B, C, D, E, F, G, H, J, K	62 x 60 x 12
746012-4XSFDTEx	A, B, C, D, E, F, G, H, J, K	74 x 60 x 12
747224-4XSFDTEx	A, B, C, D, E, F, G, H, J, K, L, M, N, P, Q, R, S, T	74 x 72 x 24

UL Type 4X Free Standing Enclosure, w/interior panel. 12 gauge 304 stainless steel, pad-lockable, easy release door clamps, interior white & exterior ANSI 61 gray, continuous hinge doors. Includes 12 gauge sub panel painted white.



Part number	X = A/C chassis style	Dimensions H x W x D
723118-4XSFSTEx	A, B, C, D, E, F, G, H, J, K, L, M, N, P	72 x 31 x 18
723718-4XSFSTEx	A, B, C, D, E, F, G, H, J, K, L, M, N, P	72 x 37 x 18
723724-4XSFSTEx	A, B, C, D, E, F, G, H, J, K, L, M, N, P	72 x 37 x 24

The Legendary
Green Bay Packers Coach
Vince Lombardi said:

“Winning is not a sometime
thing; it’s an all-the-time
thing. You don’t win once in
a while, you don’t do things
right once in a while, you do
them right all the time.

Winning is a habit.
Unfortunately, so is losing.”

STANDARD ON EVERY THERMAL EDGE AIRCONDITIONER

- Condensate evaporation package
- Fully programmable digital controller
- Thermal expansion valve
- Full product line available in NEMA Types 12, 4 & 4X
- UL Listed under Standard 484, file number SA32252
- On/off switch as mandated by UL Standard 484
- Proudly manufactured in the U.S.A.

NOTE: AIR CONDITIONERS ARE SHIPPED SEPARATELY FROM ENCLOSURES

AIR CONDITIONER OPTIONS

- Inventory on Hand
- Customer Service answering your calls
- A website that is easy to navigate AND solutions that are easy to find
- Equipment tested to perform and built to last
- Units designed with our customer’s applications and environments in mind
- Systems engineered to maintain lower running amps and higher efficiency
- Features and Accessories designed to solve critical applications as in Corrosive or Hazardous Environments
- Protective Coil Coating to protect from corrosion caused by a salt or chemical environment
- Enclosure door kill switch
- Integrated Heat Packages to provide total temperature control for your enclosure not just from the heat of summer but from the cold of winter
- Dry Contact Options to allow the use of alarms, lights and notifications
- External Heat Control to allow for customers to use an externally mounted heater in their enclosure
- Vibration Package allows for enclosure cooling on cranes, moving vehicles or other difficult locations. These systems are available in two levels
- 2” Deep Extended Filter Media for applications like flour, cement or coal when a standard filter will load to quickly
- OD Remote Controller Option to place our digital controller inside the electrical enclosure when the environment requires a more secure setting
- UL Listed for Hazardous location, Class 1, Div 2, Groups B, C, D

(972) 580-0200

or

(888) 580-0202

1751 Hurd Drive
Irving, Texas 75038

Get the Edge...Get Thermal Edge